

SUPERSTOR GLASS LINED STORAGE

Storage Tanks



Features

- **DURABLE GLASS LINED STEEL TANK** constructed of thick steel.
- **FULLY AUTOMATIC SURFACE MOUNTED THERMOSTAT** for controlling the temperature.

Performance

- **MEET OR EXCEED THE EFFICIENCY REQUIREMENTS OF ASHRAE STANDARD 90.1B-2001.**
- **ENVIRONMENTALLY SAFE CFC FOAM 1.5+ INCHES OF SUPER FOAM INSULATION FOR LOW STANDBY LOSS**

Quality

- **DURABLE GLASS LINED TANK**
- **DUAL MAGNESIUM ANODE ROD** to prolong tank life
- **5 YEAR TANK WARRANTY FOR RESIDENTIAL USE**



SCAN HERE!

For more info about the
SUPERSTOR GLASS-LINED STORAGE




SPECIFICATIONS AND APPLICATION DATA

MODELS	NOMINAL CAPACITY (GAL.)	WORKING PRESSURE (PSI)	HOT OUTLET (TOP)	FRONT CONNECTIONS
GL-50	50	150	3/4" NPT MALE	3/4" NPT MALE
GL-80	80	150	2" NPT MALE	2" NPT MALE
GL-119	119	150	2" NPT MALE	2" NPT MALE

DIMENSIONS & WEIGHT

MODEL	PRODUCT HEIGHT (IN)	PRODUCT DIAMETER (IN)	CIRCULATING PORT TOP (IN)	CIRCULATING PORT BOTTOM (IN)	T&P HEIGHT (IN)	SHIPPING WEIGHT (LBS)
	A	B	C	D	E	
GL-50	52	19-1/4	14	7	45	120
GL-80	59	23-1/4	13	7	51-1/4	165
GL-119	64	28	13	4	55	250

FRONT VIEW

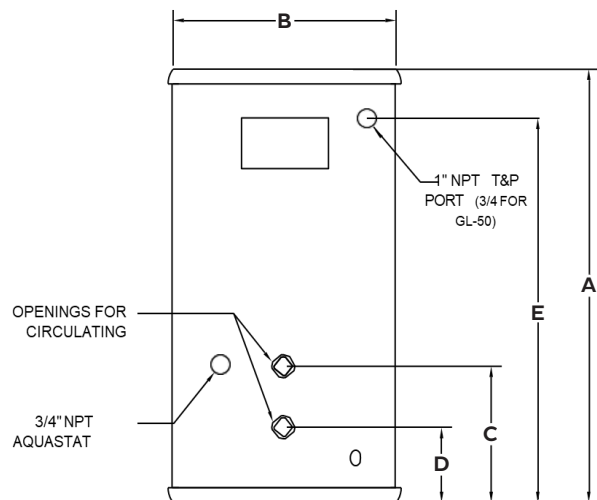

TOP VIEW

