




LEFT VIEW

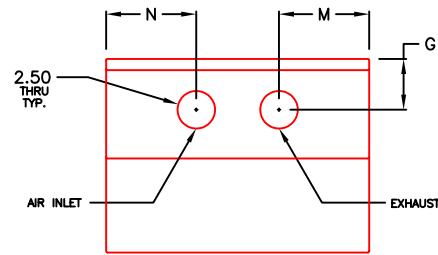

TOP VIEW

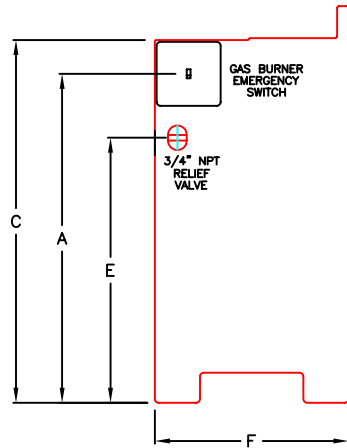

RIGHT VIEW

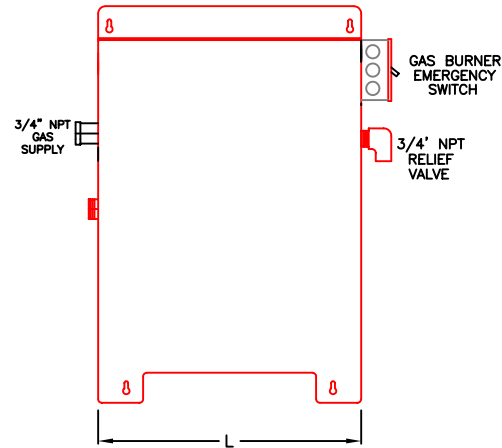

FRONT VIEW

MUNCHKIN BOILER DIMENSIONS AND SPECIFICATIONS

MODEL NUMBER	BTU/HR INPUT LOW FIRE	BTU/HR INPUT HIGH FIRE	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	VENT SIZE	AIR INLET	GAS CONN.	SUP. RET.	I.B.R.	SHIPPING WEIGHT
T50M	18,000	50,000	21.50"	12.50"	24.00"	17.88"	14.50"	12.75"	4.75"	4.50"	1.00"	3.50"	17.50"	6.00"	6.00"	3.00"	6.75"	2"	2"	3/4"	1-1/4"	40,000	58 lbs.
T80M	19,000	80,000	21.50"	12.50"	24.00"	17.88"	14.50"	12.75"	3.50"	4.50"	1.00"	3.50"	17.50"	6.00"	6.00"	3.00"	6.75"	2"	2"	3/4"	1-1/4"	64,000	58 lbs.

MUNCHKIN BOILER AMP DRAW DATA

MODEL NUMBER	CIRCULATOR	CONTROL	APPROX. TOTAL AMPS
T50M/T80M	4.0	2.3	6.3
T50MHA/T80MHA	3.0	3.3	6.3