



## Oil Fired Water Heater Submittal

**JOB NAME:**

**LOCATION:**

**WHOLESALER:**

**ARCH. / ENGR.:**

**MECH. CONTRACTOR:**

**MODEL NUMBER:**


# **SUPERstor**

## HIGH EFFICIENCY OIL FIRED WATER HEATER FEATURES:



- New Oil Fired Tank available in 30, 50 and 70 Gallons
- Heavy gauge metal jacket with trouble free appliance finish
- Glass lined, long life heavy duty steel tank
- Two anode rods for extra protection and longer tank life
- Well mounted control for extra fast reaction time
- Ceramic fiber combustion chamber
- Center Flue
- Combustion Efficiency 82%+
- Superstor oil fired water heaters are designed with all the energy standards in mind!

MODEL	STORAGE CAP. (GAL.)	FLUE (IN.)	WATER CONNECT. (IN.)	DRAIN CONNECT.	HEIGHT / DIA. (IN.)	SHIP WEIGHT (LBS.)	D.O.E. ENERGY	FIRST HOUR RATING (GAL.)
OFT-30	30	6"	3/4"	INSTALLED	51" / 22"	171	0.576	111
OFT-50	50	6"	3/4"	INSTALLED	59" / 24"	226.5	N/A	128
OFT-70	70	6"	3/4"	INSTALLED	66" / 26"	356	N/A	145

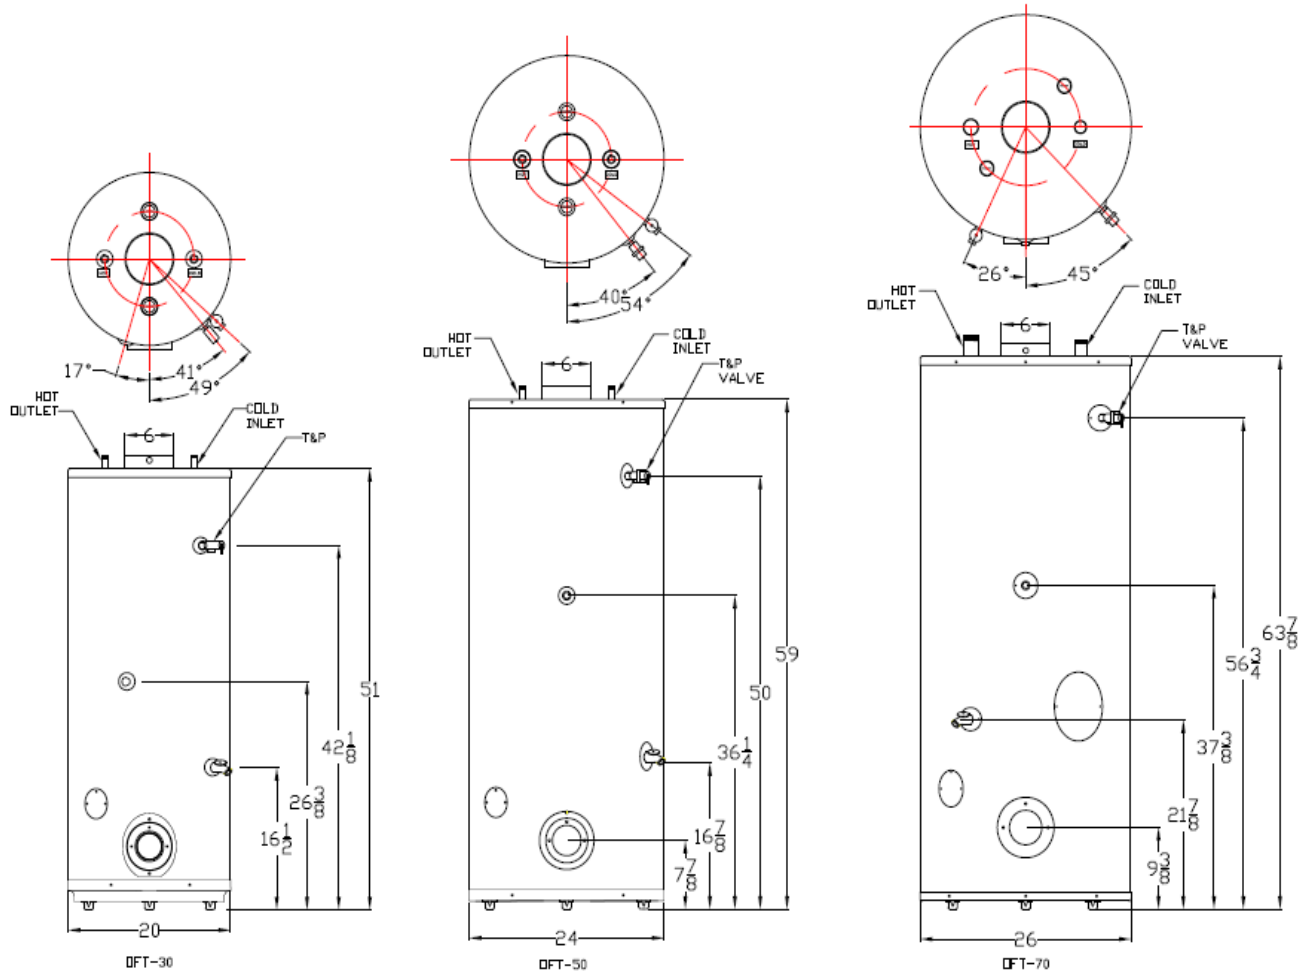

MODEL	BURNER TYPE	NOZZLE	PUMP PRESSURE	TURBULATOR SETTING	AIR BAND SETTING	AIR SHUTTER SETTING
OFT-30	BECKETT AFG	DANFOSS 0.65 X 80° AS or equal	100 psi	F-3 HEAD	CLOSED	4
OFT-50	BECKETT AFG	DELAVAN 0.75 X 80° A or equal	100 psi	F-3 HEAD	CLOSED	4
OFT-70	BECKETT AFG	DELAVAN 0.85 X 80° A or equal	100 psi	F-3 HEAD	CLOSED	4